

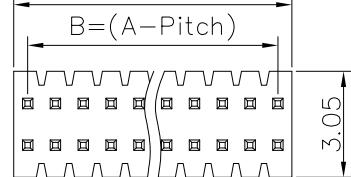


REV.	DESCRIPTION	DATE
A	New Drawing	2017/09/19


$$A = (\text{Pitch} \times \text{no. of contact}) \pm 0.30$$

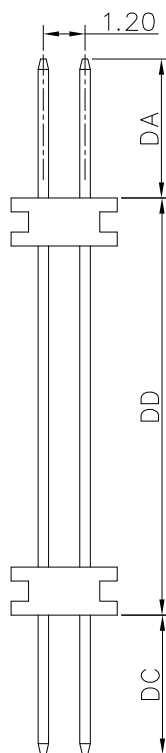


0.80 SQ0.30

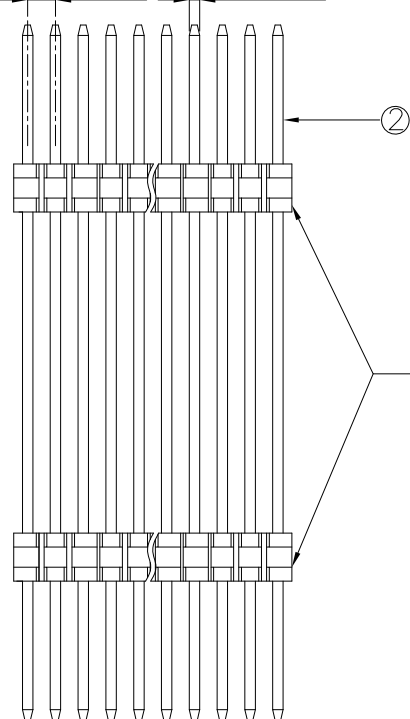

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 0.75A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 1000V AC/Min				

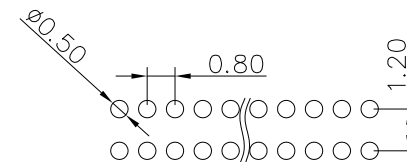

P.C.B LAYOUT

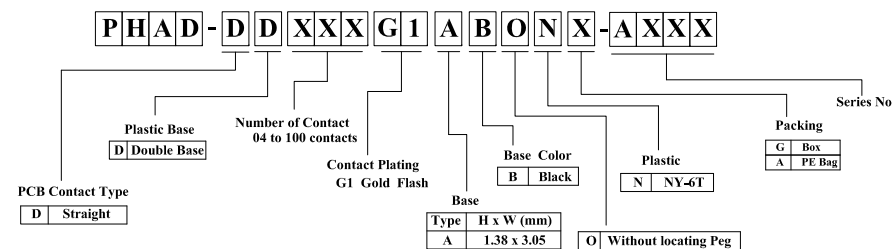

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance			TITLE	0.8 x 1.2Pin Header, straight Dual Row	
REV.	UNIT	SCALE	DRAWN	DATE	NO.
A	mm	1:1		09-19-17'	002
			CHECK	DATE	PART NO.
			APPROVED	DATE	PHAD-DDXXXG1ABONX-AXXX
			CUSTOMER NO.		

(Q2-R03-01A) ST-R05-07