

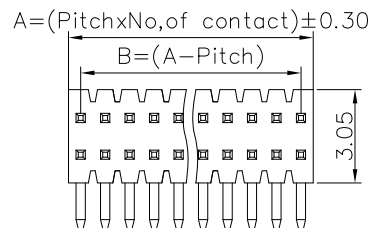



REV.	DESCRIPTION	DATE
A	New Drawing	2014/07/14




LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 0.75A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 1000V AC/Min



P.C.B LAYOUT

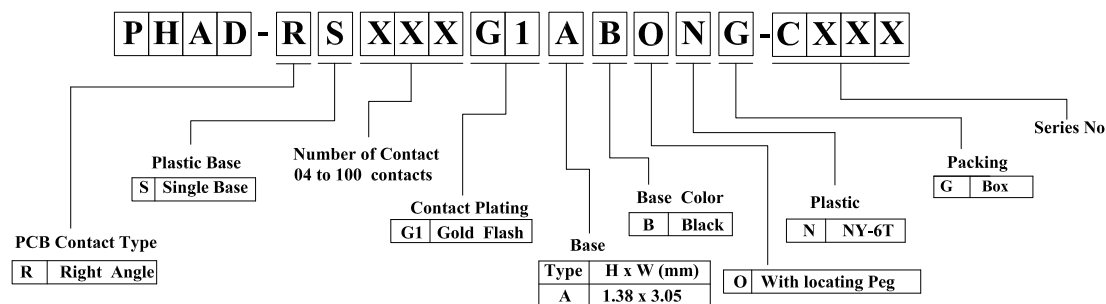

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

峻豪電子股份有限公司 Superior Tech Co., Ltd.				General Tolerance		TITLE	0.8 Pin Header Dual Row Right Angle Base H=1.38				
				X. ± 0.5		DRAWN Zhanghonglan		DATE		NO.	
				.X ± 0.3				07-14-14'		002	
				.XX ± 0.2		CHECK		DATE		PART NO.	
				.XXX ± 0.1				DATE		PHAD-RSXXXG1ABONG-CXXX	
REV.	UNIT	SCALE		APPROVED		DATE		CUSTOMER NO.			
A	mm	1:1		角度	± 5°						