

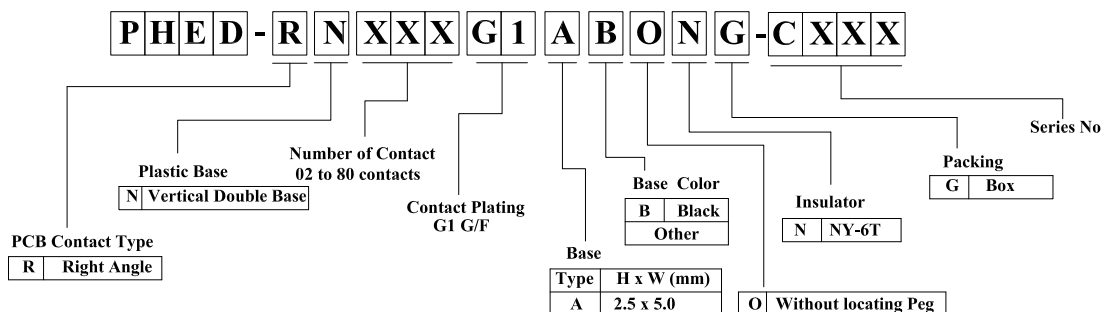
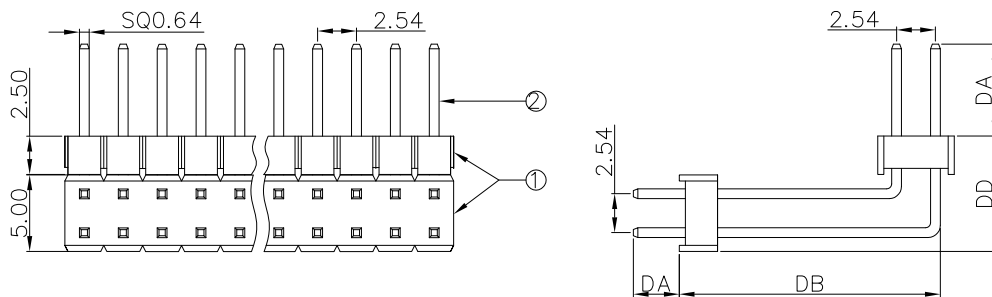


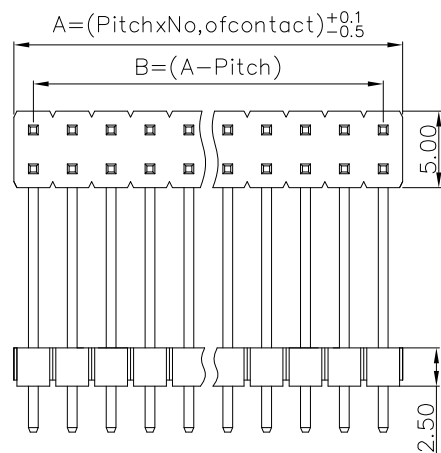

REV.	DESCRIPTION	DATE
A	New Drawing	2007/6/21

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	xxx

Temperature Rating : -40°C ~ +105°C .
Dielectric Withstanding Voltage : 1000V AC/Min

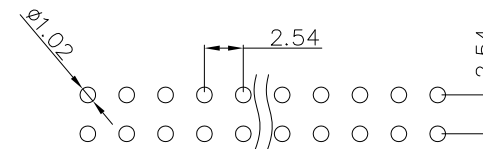

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
A	mm	2:1	

General Tolerance	TITLE	Pitch 2.54x2.54mm Pin Header Angle Dual Row, Double Plastic Base
X. ± 0.5	DRAWN	DATE
.X ± 0.3	Xialiangjian	06-21-07'
.XX ± 0.2	CHECK	DATE
.XXX ± 0.1	Fuqianshan	06-21-07'
角度 ± 5°	APPROVED	DATE
	Jhen-fa	06-21-07'
		NO. 002
		PART NO. PHED-RNXXXG1ABONG-CXXX
		CUSTOMER NO.

(Q2-R03-01A) ST-R05-07