

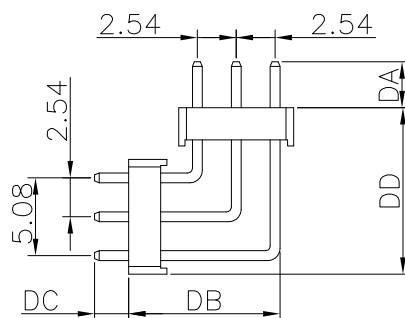
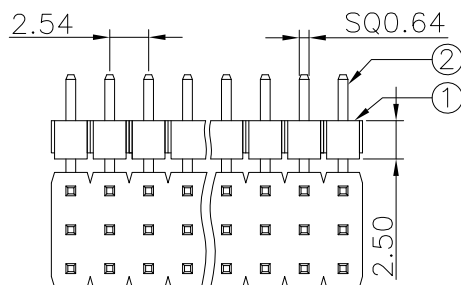


$$A = (\text{Pitch} \times \text{No. of contact}) \pm_{-0.5}^{+0.1}$$

$$B = (A - \text{Pitch})$$

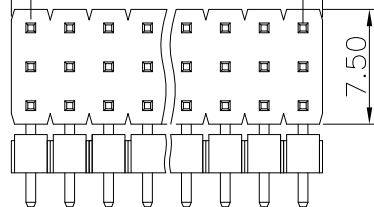


P H E T - R N X X X G 1 A B O N G - C X X X

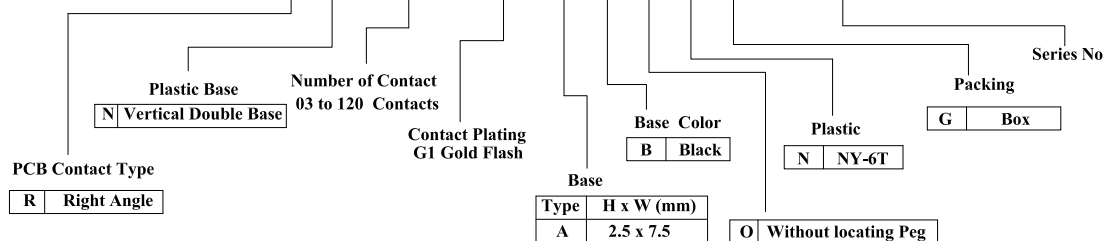

REV.	DESCRIPTION	DATE
A	New Drawing	2017/10/19

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 1000V AC/Min

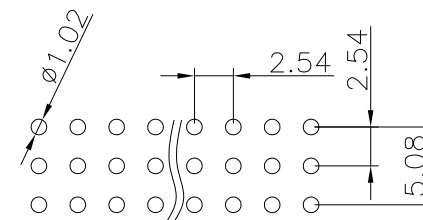

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
A	mm	1:1	

General Tolerance	TITLE	Pitch 2.54x2.54x2.54mm Pin Header Tribble Row,90°	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	Andy	10-19-17'	002
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	APPROVED	DATE	PHET-RNXXXG1ABONG-CXXX
角度 ± 5°			CUSTOMER NO.

(Q2-R03-01A) ST-R05-07