

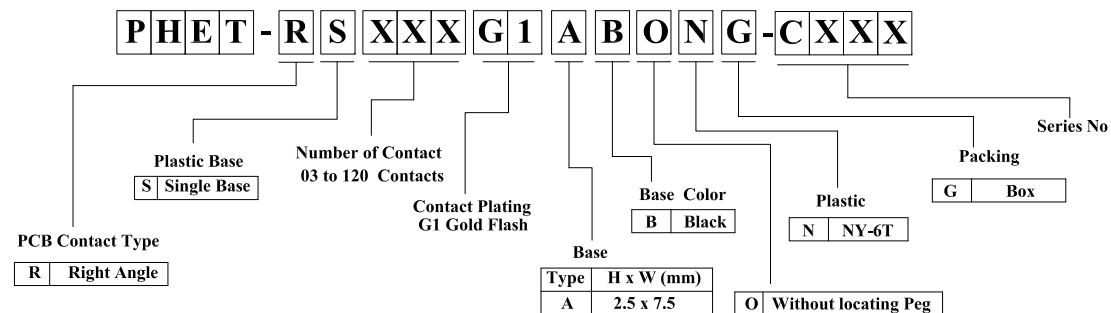
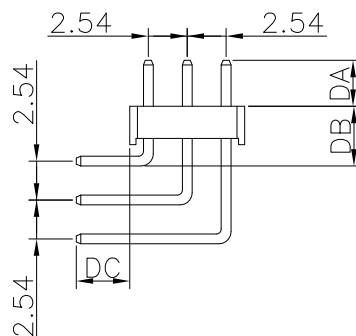
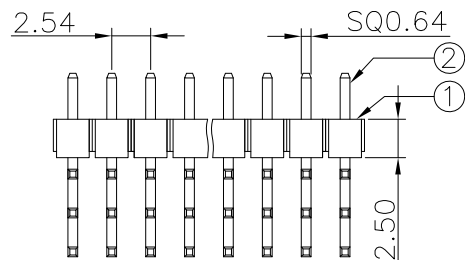


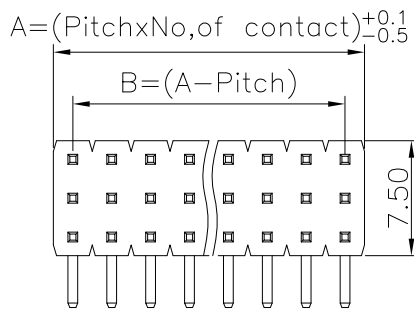

REV.	DESCRIPTION	DATE
A	New Drawing	2017/10/19

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 1000V AC/Min				

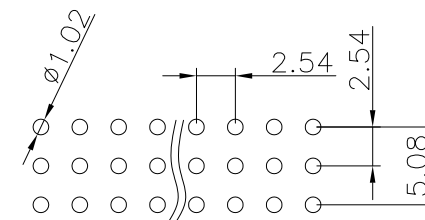

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

竣豪電子股份有限公司 Superior Tech Co., Ltd.				General Tolerance		TITLE	Pitch 2.54x2.54x2.54mm Pin Header Tribble Row,90°			
				X. ± 0.5		DRAWN Andy		DATE	NO.	
				.X ± 0.3				10-19-17'	002	
				.XX ± 0.2		CHECK		DATE	PART NO.	
				.XXX ± 0.1				PHET-RSXXXG1ABONG-CXXX		
REV.	UNIT	SCALE		角度	± 5°	APPROVED	DATE	CUSTOMER NO.		
A	mm	1:1								

(Q2-R03-01A) ST-R05-07