
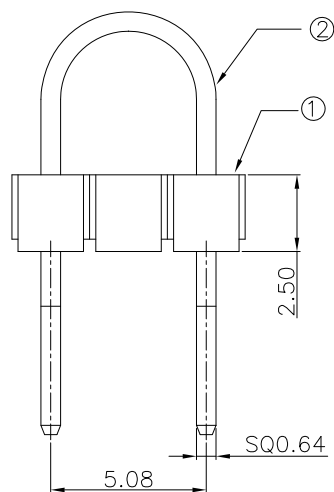



REV.	DESCRIPTION	DATE
A	New Drawing	2020/03/12

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	1
Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 1000V AC/Min				



P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

竣豪電子股份有限公司 Superior Tech Co., Ltd.					General Tolerance		TITLE	Pitch 2.54mm Pin Header 1x3PIN					
					X. ± 0.5		DRAWN Tom		DATE		NO.		
					.X ± 0.3				03-12-20'		002		
					.XX ± 0.2		CHECK		DATE		PART NO.		
.XXX ± 0.1		DATE		PHUS-XXXBNX-AXXX									
REV.		UNIT		SCALE				APPROVED		DATE		CUSTOMER NO.	
A		mm		1:1				角度		± 5°			

(Q2-R03-01A) ST-R05-07