

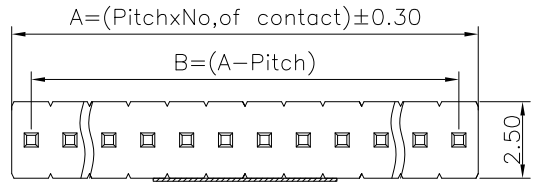


REV.	DESCRIPTION	DATE
A	New Drawing	2023/05/25

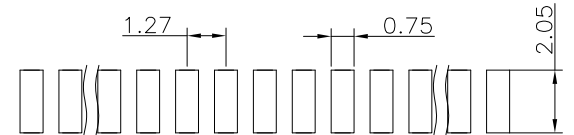


LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Mylar	Polyimide	250°C-SHORT TERM	1

Temperature Rating : -40°C ~ +125°C .  
Dielectric Withstanding Voltage : 500V AC/Min

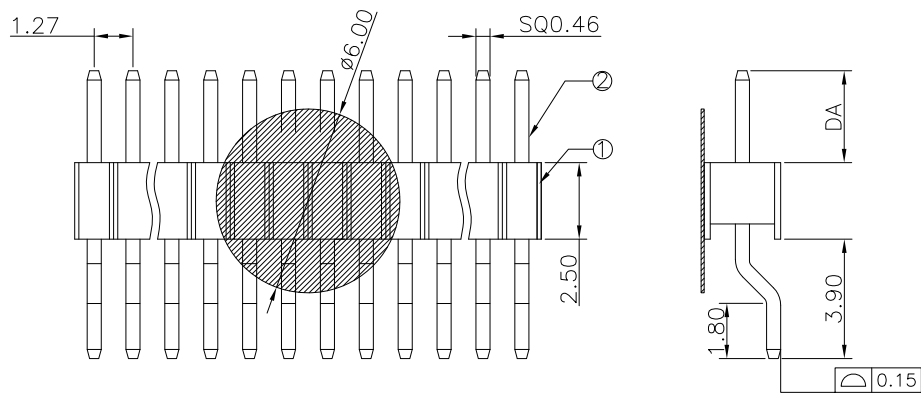

### P.C.B LAYOUT

RoHS compliant

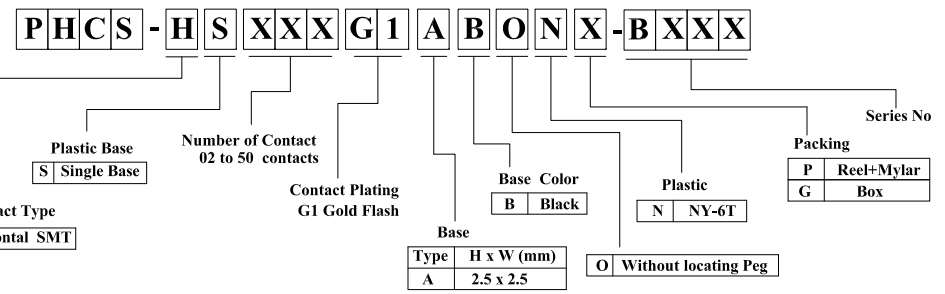

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance	TITLE PH 1.27mm Pin Header, Horizontal SMT Single Row		
	X. ± 0.5	DRAWN Tom	DATE 05-25-23'
	.X ± 0.3	CHECK	NO. 002
	.XX ± 0.2	APPROVED	PART NO. PHCS-HSXXXG1ABONX-BXXX
	.XXX ± 0.1		CUSTOMER NO.
角度	± 5°		

REV.	UNIT	SCALE
A	mm	1:1

