
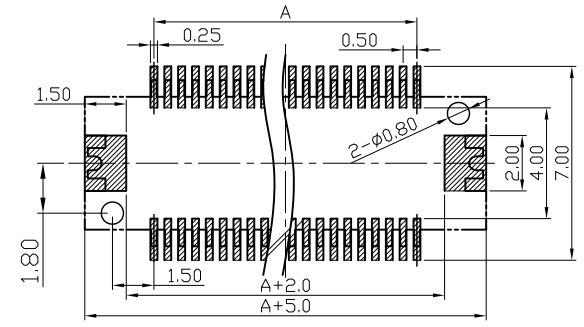


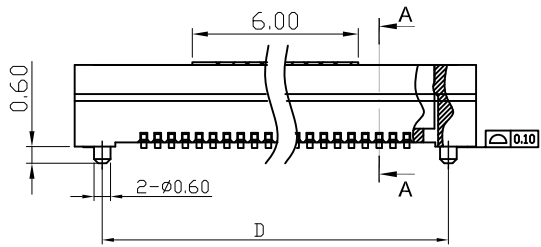



REV.	DESCRIPTION	DATE
A	NEW DRAWING	2014/02/24
B	增加電鍍選向	2019/01/10


Mating with:  
"BBAB-XXXG1145NCLI-B"

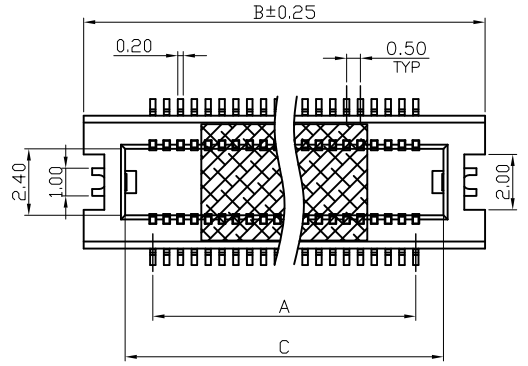

LTR	Part Name	Material	Description	QTY
1	Housing	LCP +30%玻纖 UL94V-0	260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2
4	Mylar	PI		1

Temperature Rating : -40°C ~ +105°C .

Dielectric Withstanding Voltage : 300 V AC/Min

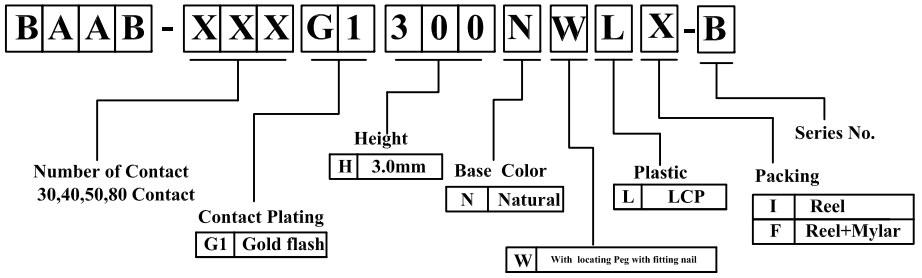

Circuit No.	Dimensions			
	A	B (A+5.0)	C (A+2.0)	D (A+3.0)
2*15P	7.00	12.00	9.00	10.00
2*20P	9.50	14.50	11.50	12.50
2*25P	12.00	17.00	14.00	15.00
2*40P	19.50	24.50	21.50	22.50

☐ : SOLDER AREA  
TOLERANCE: ±0.05,  
RECOMMENDED PCB LAYOUT  
(TOP VIEW)

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance		TITLE PH0.5 BTOB H3.0母座成品	
X. ± 0.5	DRAWN Tom	DATE 2019/01/10	DWG.NO. 002
.X ± 0.2	CHECK	DATE	PART NO. BAAB-XXXG1300NWLX-B
.XX ± 0.10	APPROVED	DATE	CUSTOMER NO.
.XXX ± 0.05	角度 ± 5°		

REV. B	UNIT mm	SCALE 1:1	
--------	---------	-----------	--