
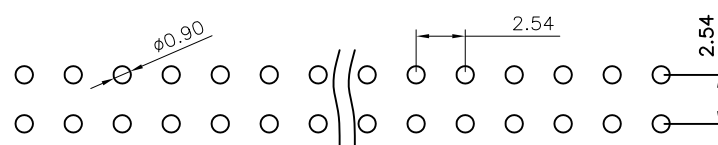
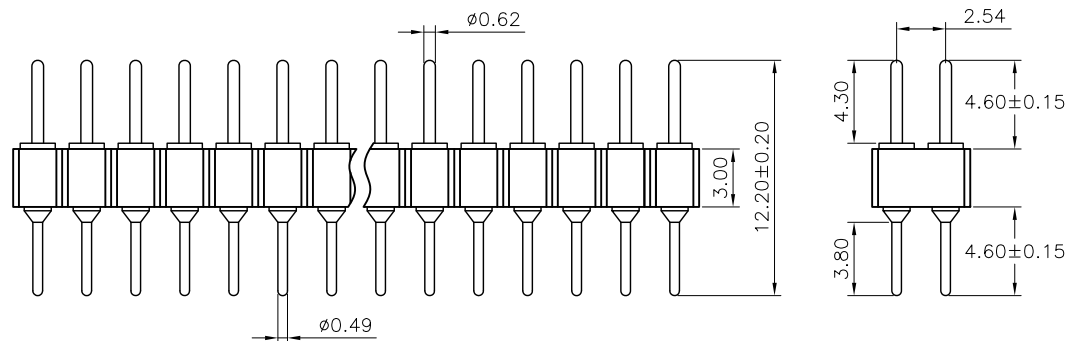


REV.	DESCRIPTION	DATE
A	New Drawing	2022/06/09

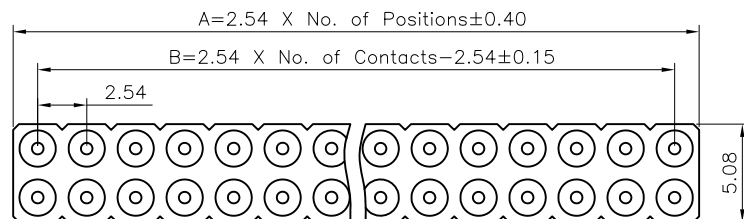


P.C.B LAYOUT

Material:
Pin(outer sleeve): Brass,machined CuZn38Pb2
Plating(outer sleeve):
Tin plated:2μm/80μ"Ni, 5μm/200μ"Sn
Gold Plated:2μm/80μ"nickelfull gold
Plating(contact): 2μm/80μ"nickel, gold or Tin plated
Insulator black(housing): PPS (UL94V-0)

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Operaing voltage: 60VAC/DC

Mechanical:
Mechanical life cycle:min.200
Operaing temperatures: Gold Plated:-55° C to+105° C
Tin plated:-40° C to+105° C
Soldering temperature: +260° C,10s max

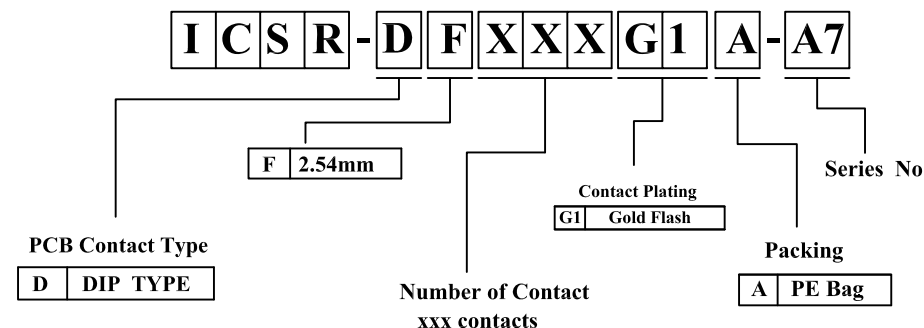

RoHS Compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
A	mm	1:1	

General Tolerance		TITLE	PH 2.54mm SIP Socket Straight Dual Row,Length 12.2mm	
X. ± 0.5		DRAWN Jacky	DATE	NO.
.X ± 0.3			06-09-22"	D047
.XX ± 0.2		CHECK Tom	DATE	PART NO.
.XXX ± 0.1			06-09-22"	ICSR-DFXXXG1A-A7
角度	± 5°	APPROVED Tom	DATE	CUSTOMER NO.
			06-09-22"	

(Q2-R03-01A) ST-R05-07