

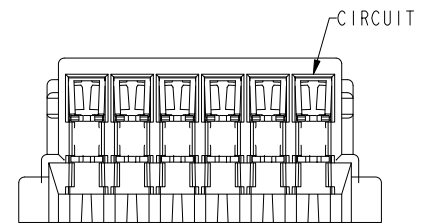

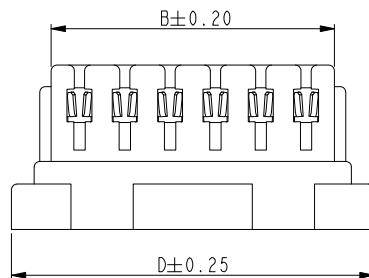

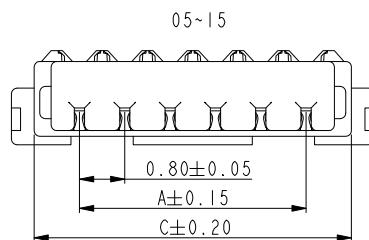



REV.	DESCRIPTION	DATE
A	New Drawing	2017/11/30
B	圖面更新	2023/11/20




APPLICABLE WIRE: AWG #32, #34, #36

PIN	A	B	C	D
02	0.80	1.80	2.40	3.20
03	1.60	2.60	3.20	4.00
04	2.40	3.40	4.00	4.80
05	3.20	4.20	4.80	5.60
06	4.00	5.00	5.60	6.40
07	4.80	5.80	6.40	7.20
08	5.60	6.60	7.20	8.00
09	6.40	7.40	8.00	8.80
10	7.20	8.20	8.80	9.60
11	8.00	9.00	9.60	10.40
12	8.80	9.80	10.40	11.20
13	9.60	10.60	11.20	12.00
14	10.40	11.40	12.00	12.80
15	11.20	12.20	12.80	13.60



INDEX	PART NAME	MATERIAL	FINISH
1	HOUSING	(HF) LCP, UL94-V0; COLOR: CREAM/BLACK	
2	TERMINAL	COPPER ALLOY; ±0.10mm	(1) TIN PLATED OVER NICKEL (2) GOLD FLASH PLATED ON CONTACT AREA, OVER NICKEL

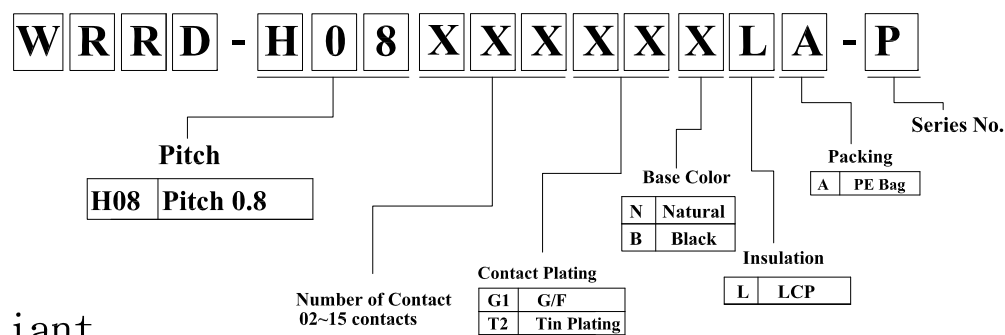

RoHS compliant

竣豪電子股份有限公司 Superior Tech Co., Ltd.				General Tolerance		TITLE	PH0.8mm Housing		
				X. ± 0.5		DRAWN Jacky		DATE	NO.
				.X ± 0.3				11-20-23'	T057
				.XX ± 0.2		CHECK Tom		DATE	PART NO.
				.XXX ± 0.1				11-20-23'	WRRD-H08XXXXXXXXLA-P
REV. B	UNIT mm	SCALE 1:1		角度	± 5°	APPROVED Tom	DATE 11-20-23'	CUSTOMER NO.	


(Q2-R03-01A) ST-R05-07

REV.	DESCRIPTION	DATE
A	New Drawing	2023/11/20

02~13 PIN




CONNECTOR





BAG

PIN, Q'TY/BAG, PE BAG DIM.	PIN, BAG/BC, PCS/BC
02~15, 1,000 PCS/BAG	02~15, 80 BAG, 80,000 PCS/BC

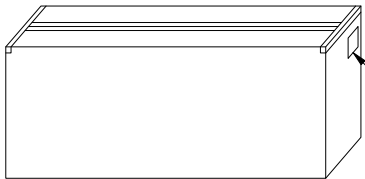


LABEL




CARTON

14~15 PIN




CONNECTOR




LABEL

BAG




(4 BAG/BOX)

BOX A



BOX B

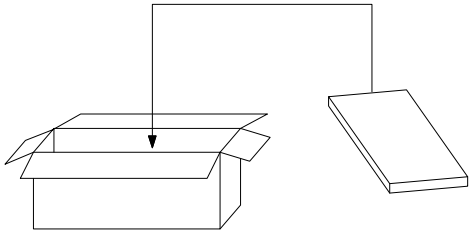

CARTON

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	WRRD-H08XXXXXXXXLA-P 包裝圖	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		Janky	11-30-23'	T057
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		Tom	11-20-23'	WRRD-H08XXXXXXXXLA-P
角度		APPROVED	DATE	CUSTOMER NO.
± 5°		Tom	11-20-23'	

REV.	UNIT	SCALE	
A	mm	1:1	

(Q2-R03-01A) ST-R05-07