




REV.	DESCRIPTION	DATE
A0	New Drawing	2008/05/19

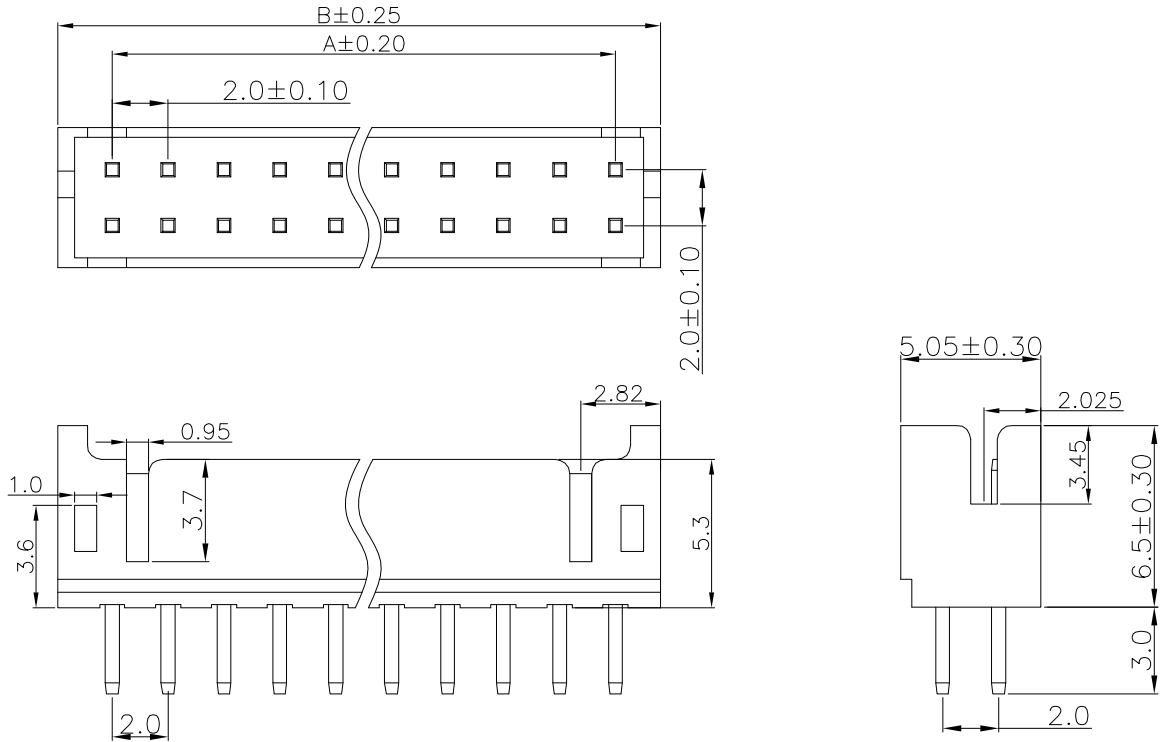

LTR	Part Name	Material	Description	QTY
1	Housing	NY-66 UL94V-2	Initial : 1000M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 2.0A Initial : 20m Ohms Max.	XX

Temperature Rating : -25°C ~ +85°C .
Dielectric Withstanding Voltage : 800V AC/Min

Contact	Dimension mm	
	A	B
2x3	4.0	8.0
2x4	6.0	10.0
2x5	8.0	12.0
2x6	10.0	14.0
2x7	12.0	16.0
2x8	14.0	18.0
2x9	16.0	20.0
2x10	18.0	22.0
2x11	20.0	24.0
2x12	22.0	26.0
2x13	24.0	28.0
2x14	26.0	30.0
2x15	28.0	32.0
2x16	30.0	34.0
2x17	32.0	36.0
2x18	34.0	38.0
2x19	36.0	40.0
2x20	38.0	42.0

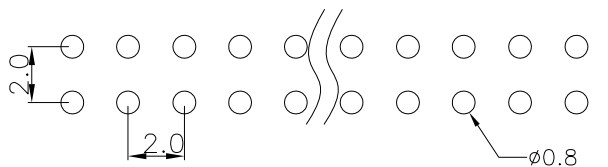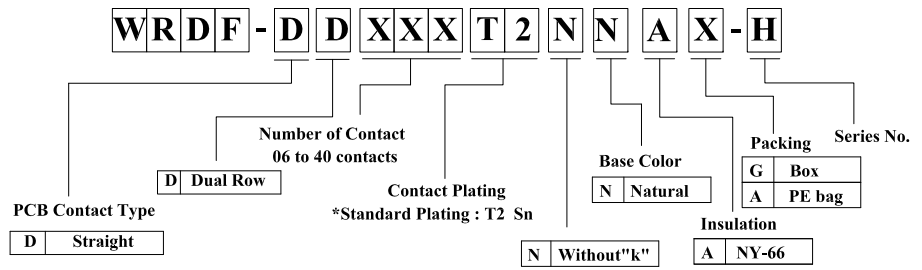

P.C.B. LAYOUT
RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance	TITLE	2.0mm Wafer Straight Dual Row 02 to 40 Contacts	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	SUNCUI	05-19-08'	D009
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	APPROVED	DATE	WRDF-DDXXXT2NNAX-H
角度 ± 5°			CUSTOMER NO.

REV.	UNIT	SCALE	
A0	mm	2:1	